





## **Specifications**

Holland Stone<sup>™</sup> is produced using a "no-slump" concrete mix, made under extreme pressure and high frequency vibrations. Unit pavers will meet or exceed the requirements established in the ASTM C936 (standard specification for interlocking concrete paving units). Requirements of this standard include an average compressive strength of 8,000 psi, average absorption no greater than 5%.



## Laying Patterns

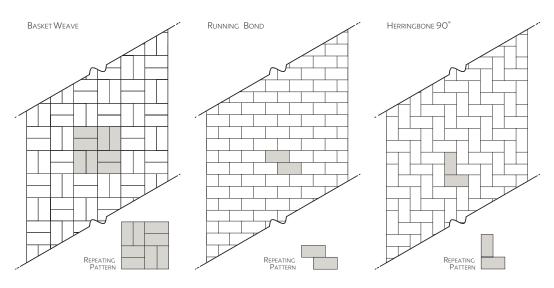

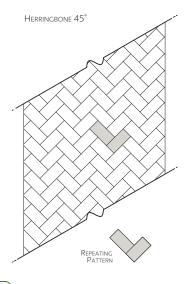



Available at:



www.romanstone.com