


Umbriano[®]



1-800-UNILOCK | UNILOCK.COM

Umbriano[®]

ENDURACOLOR

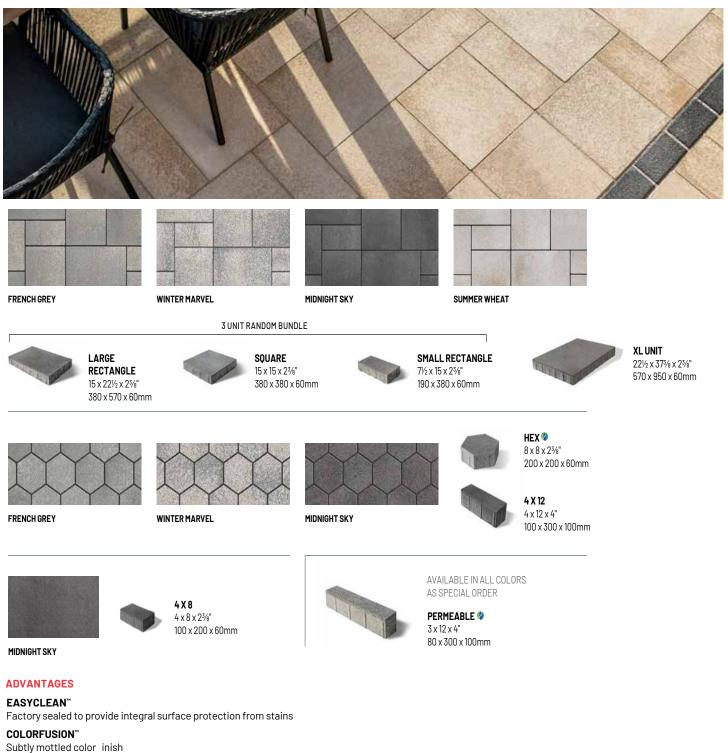

PEDESTRIAN FRIENDLY

Not recommended for vehicular use

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. Please refer to the Sealer and Polysand Best Practices on page 96, and Important Notice on page 99. Unilock offers adjustable and stackable pedestal systems; please contact your Territory Manager for pricing and availability. All measurements are nominal.

Internal Use Only. UMB ON

UNILOCK



UMB_CH_04_2021


Umbriano[®] 60mm




LAYING PATTERNS



Umbriano Fixed Random_A



Umbriano Fixed Random_B



Umbriano Multi-Unit Random_I



FRENCH GREY XL ALSO AVAILABLE

A	Ρ	Ρ	LI	С	A	ΤI	0	Ν	S	

APPEARANCE

Edge Detail - Micro Surface Texture - Umbriano Mottled Joint Spacing - 7mm Void - n/a

TECHNOLOGIES

ENDURACOLOR[™] Refined surface and long-lasting color

EASYCLEAN[™]

Factory sealed to provide integral surface protection from stains

COLORFUSION[™] Subtly mottled colored finish

TECHNICAL INFORMATION

MIDNIGHT SKY

Conforms to ASTM C 936 Eligible for LEED v4.1 credits see page 17.





WINTER MARVEL



XL ALSO AVAILABLE

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. Please refer to the Sealer Best Practices on page 114 and Important Notice on page 116. All measurements are nominal. Contact Unilock for more information.

UNILOCK 73

ENDURACOLOR

UMBRIANO 4X8

SINGLE

60MM

106.20

11.80

0.22

9.00

1.50

3.00

4.58

322

-

1

-

•

-

.

MARENGO

UMBRIANO XL

SINGLE

60MM

116.57

11.66

5.83

10.00

0.32

_

MARENGO

UMBRIANO

RANDOM

MARENGO

60MM

116.57

11.66

-

1.46

10.00

.

_

Bundle Type

Plant Produced

Thickness (mm)

Bundle

Layer

Section

Stone

Layers

Sections

SqFt

SQFT PER

PER BUNDLE

Umbriano°80mm 🥐

ENDURAC[®]LOR[®]

.....



LAYING PATTERNS

APPLICATIONS



Umbriano 4x12 HB_1

 -	
	-

Umbriano 4x12 RB_H

.

APPEARANCE Edge Detail - Micro Surface Texture - Umbriano Mottled

Joint Spacing - 7mm

TECHNOLOGIES

Void - n/a

PERMEABLE Can be installed to allow water to flow through

ENDURACOLOR[™] Refined surface and long-lasting color

EASYCLEAN™

Factory sealed to provide integral surface protection from stains

COLORFUSION[™] Subtly mottled colored finish

TECHNICAL INFORMATION

Conforms to ASTM C 936 Eligible for LEED v4.1 credits - see page 17.

WINTER MARVEL





FRENCH GREY

MIDNIGHT SKY



4 X 12 100 x 300 x 80mm 3 % x 11 % x 3 %" 288 units/Bundle .32 Sq.Ft./Stone

Bundle Type Plant Produced Thickness (mm) undle ayer ection	SINGLE MARENGO 80MM 93.04 11.63
Thickness (mm) undle ayer ection	80MM 93.04
undle ayer control of the section control of	93.04
ayer ection	
ection	11.63
	-
tone	0.32
ayers	8.00
ections	-
qFt	1.02
ection	-
ayer	11.81
undle	94.49
qFt	3.05
ection	-
ayer	35.43
undle	283.46
qFt	3.10
ection	-
undle	288.00
ayer	426
ection	-
undle	3,404
eflectance	Stock
R .18 SRI 17	1
R n/a SRI n/a	1
R .35 SRI 38	1
	tone tone tone tone tone tone tone tone

Notes: SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid, Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. Please refer to the Sealer Best Practices on page 114 and Important Notice on page 116. Il measurements are nominal. Contact Unilock for more information.